


Title: METHOD AND ARRANGEMENT
FOR AUTOMATED PROVISION OF SERVICE HINTS

Inventor(s): Snow et al.

Atty. Ref. 706807US1

1/3

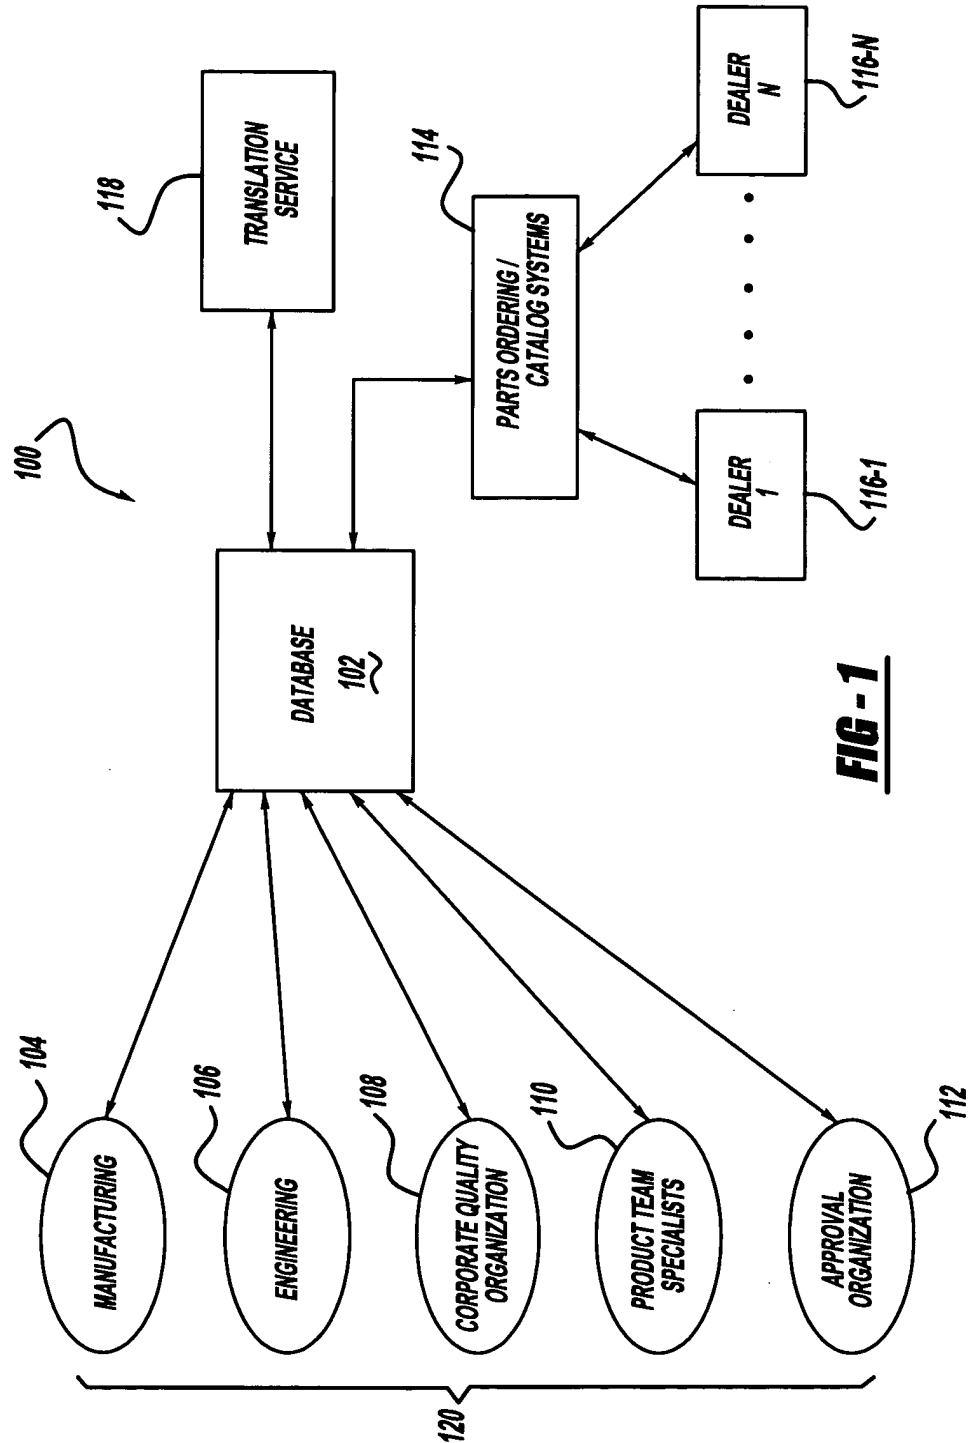


**Title: METHOD AND ARRANGEMENT
FOR AUTOMATED PROVISION OF SERVICE HINTS**

Inventor(s): Snow et al.

Atty. Ref. 706807US1

2/3

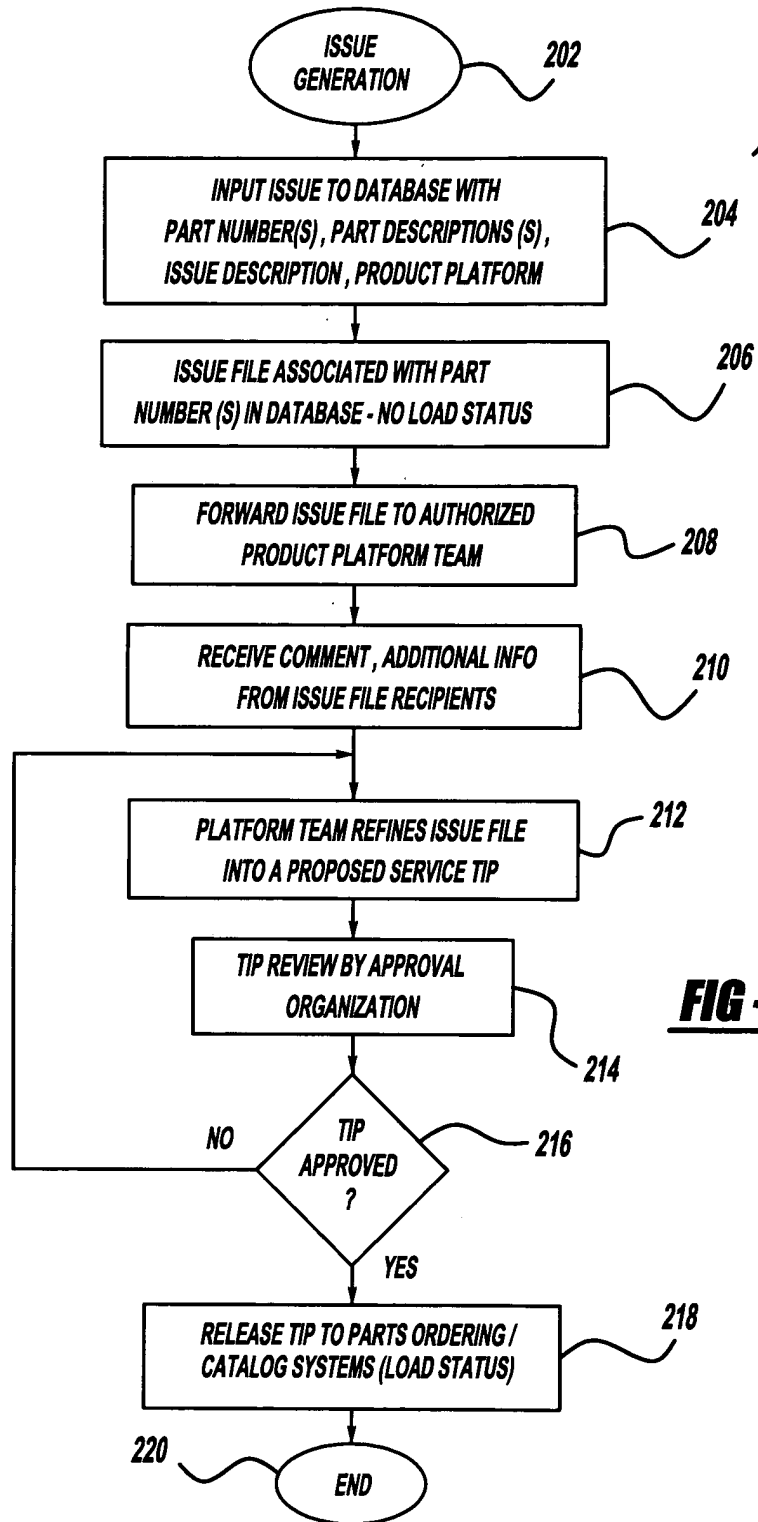

Title: METHOD AND ARRANGEMENT
FOR AUTOMATED PROVISION OF SERVICE HINTS

Inventor(s): Snow et al.
Atty. Ref. 706807US1

3/3

Part Status	Order Status	Status Code Reference	Backorder	Promotion
-------------	--------------	-----------------------	-----------	-----------

Part Inquiry	Pipeline	Parts Locator	Supersedece	Price Change Inquiry
--------------	----------	---------------	-------------	----------------------

Please click continue to view Part Inquiry information

Part Number: 12345
Part Description : 2004 xyz Control Module

SERVICE REPAIR TIPS
PLEASE PROVIDE A COPY OF THIS SHEET TO THE SERVICING TECHNICIAN
PRIOR TO ORDERING THIS PART, THE FOLLOWING MUST BE VERIFIED:

CONDITION 1 - If the Control Module is being replaced for instrument cluster lighting and/or heater control illumination and illumination is not adjustable please check for fault codes in the Control Module if Code 3 is present, the code should be cleared and then the vehicle road tested. If code 3 does not return and no other faults are set, the vehicle should be returned to the customer. DO NOT REPLACE the Control Module for this issue. A SB is pending which will address the erroneous fault conditions sensed by the Control Module . The SB should be available 11/1/2004. If the fault code does return further diagnosis is required.

CONDITION 2 - If the Control Module is being replaced due to a Power Sliding Door/Liftgate issue please investigate the Door/Liftgate modules and/or the latches.

CONDITION 3 - If the Control Module is being replaced due to vehicle alarm going off/horn sounding & headlamps flashing) & key fobs will not disarm, DO NOT REPLACE The Control Module
This condition will occur only on vehicles built without option A. Verify vehicle does not have the scales code for Option A and
PERFORM BATTERY DISCONNECT TO CORRECT CONDITION. A SB is pending which will address Condition 3. The SB should be available 9/1/2004

COMPANY RESERVES THE RIGHT TO BACK CHARGE DEALERS THAT DO NOT COMPLY WITH COMPANY WARRANTY AND POLICY PROCEDURES AS OUTLINED IN THE DEALERS POLICIES AND PROCEDURES MANUAL

Continue	Print Preview
----------	---------------

FIG - 3